
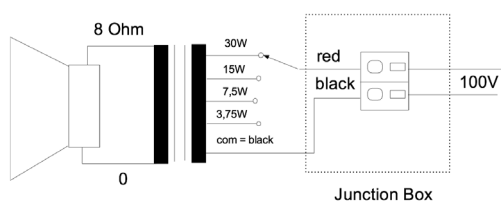



ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use
in ABS with 30 Watt Power

EN
54-24

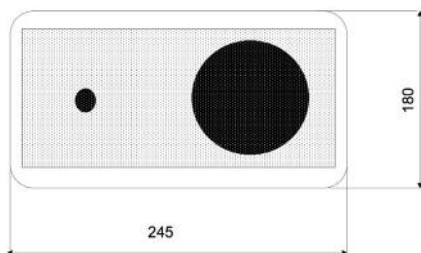

TECHNICAL DATA

ML-260WT/EN5424





| | |
|-------------------------------|--|
| Loudspeaker: | 2-Way - System |
| Power-Consumption: | 100V-30-15-7,5-3,75W |
| Frequency-Range: | 60-20 000 Hz |
| EN-Sensitivity 1W/4M: | 72 dB |
| SPL max 30W/4M: | 87 dB |
| SPL 1W/1M max. EASE/Ulysses: | 93 dB (5,5 kHz) |
| SPL 30W/1M max. EASE/Ulysses: | 108 dB (5,5 kHz) |
| Radiation H (0,5/1/2/4KHz): | 360°/190°/118°/96° |
| Radiation I V (0,5/1/2/4KHz): | 360°/220°/238°/200° |
| EN degree: | EN Type B, weather-proof, outdoor-certificated |
| Dimension: | 245 x 180 x 165 (185) mm |
| Weight: | 2,6 kg |
| Material: | ABS |
| Color: | black or white |
| Certificate-Nr.: | 1293-CPR-0495 |
| Order-Nr.: | ML-260WT/EN5424-BK ML-260WT/EN5424-WH |

- Weather-proof through Alu-Grill, Alu-Bracket & Stainless Steel Screws
- Spezial DIN 912-ISO 4762 screws
- Very fast mounting through wall mounting bracket
- Quick power-change through rotary switch on rear panel
- Flame retardant material acc. to EN 60695-11-20, 5VB
- 100V-tappings with junction box
- Ceramic clamp & thermal fuse by request

ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use
in ABS with 30 Watt Power

Radiation

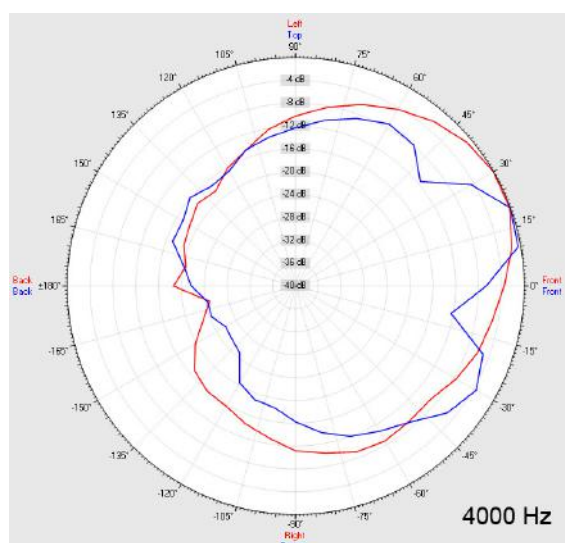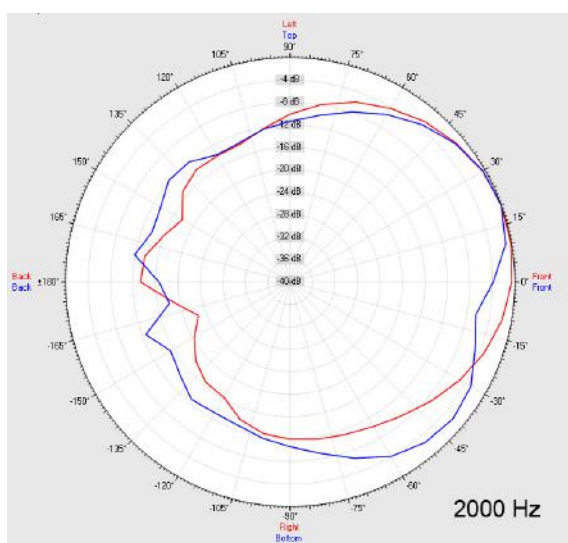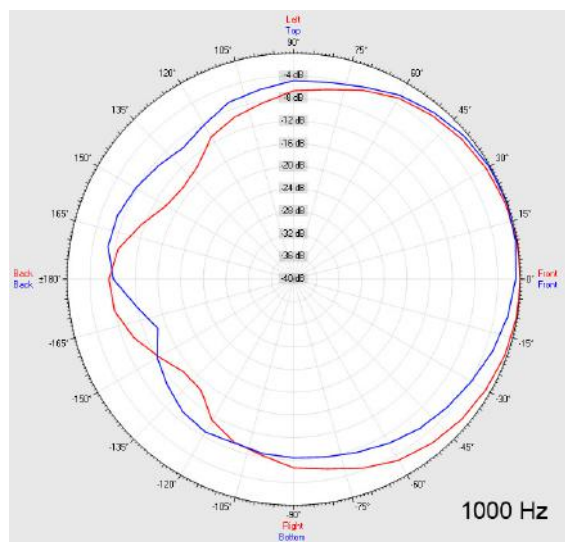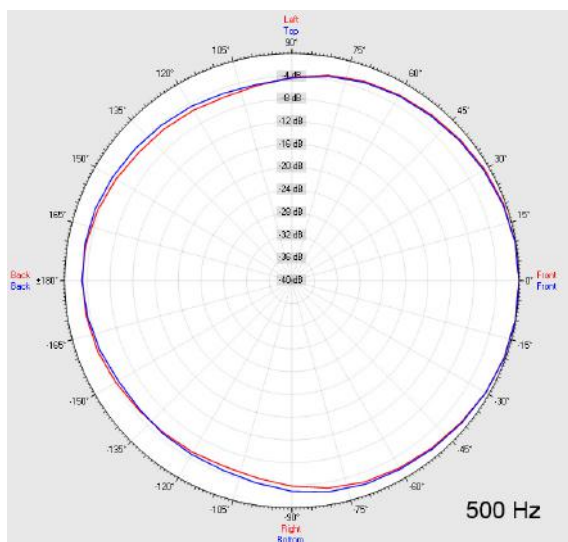

| Test method | Axis | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz |
|--------------|------|--------|---------|---------|---------|
| EN 54-24 | HOR | 360° | 190° | 118° | 96° |
| EN 54-24 | VER | 360° | 220° | 238° | 200° |
| EASE/Ulysses | HOR | 360° | 180° | 85° | 90° |
| EASE/Ulysses | VER | 360° | 160° | 160° | 100° |



ML-260WT/EN5424

EN 54-24 On-Wall / On-Ceiling - Speaker for Outdoor Use
in ABS with 30 Watt Power



Elektroakustische Komponenten

Isobar-Diagramm

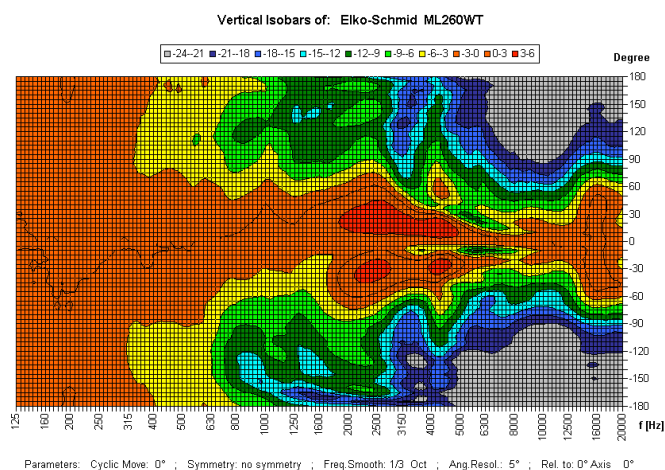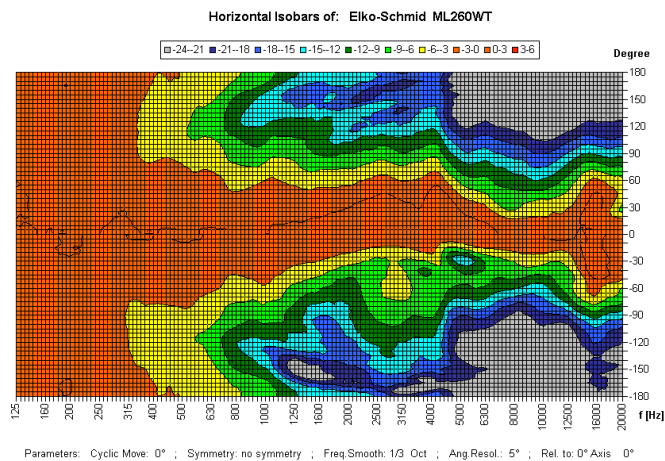

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

15

DoP: 498058129314-OWS-PN-0027

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

ML-260WT/EN5424

Intended Option:
Type B