

# WT-D5800 EC7




Order no: WT-D5800 EC7  
Alternative products: WT-D5800 EC7

## Specifications

Power source	AC mains 50/60 Hz (supplied AC adapter must be used)
Power supply	13.5 V
Current consumption	350,0 mA
Diversity principle	Space diversity (digital diversity)
Frequency response	50 Hz - 12 kHz
Receiving frequency	823 - 832 MHz
Automatic frequency scan	yes
Receiver sensitivity	24 dBμV or less (Bit error rate: 1E-5 or less)
Antenna inputs	2, 75 Ω, BNC (phantom powering for antenna), 9 V DC, 30 mA (max)
Antenna outputs	2, 75 Ω, BNC (Gain 0 dB)
Audio output	MIC/LINE (selectable): -60 dBV (MIC)/-20 dBV (LINE), 600 Ω phone jack (unbalanced), 600 Ω XLR-3-32 type connector (balanced)
Audio mixing input	-20 dBV, 10 kΩ, unbalanced, phone jack
Indicator	antenna A, antenna B, AF peak, LCD for frequency, FBS, AF level, security setting, battery level, receiving level
Selectable frequencies (combined)	70
Simultaneous channels (combined)	24 ()
Dimensions (W x H x D)	210 x 44 x 212 mm
Dimensions (ø x D)	x 212 mm
Finish	Resin, black
Operating humidity	30 to 85 %RH (no condensation)
Operating temperature	-10 to +50 °C (14 to 122 °F)

# WT-D5800 EC7

## Appearance

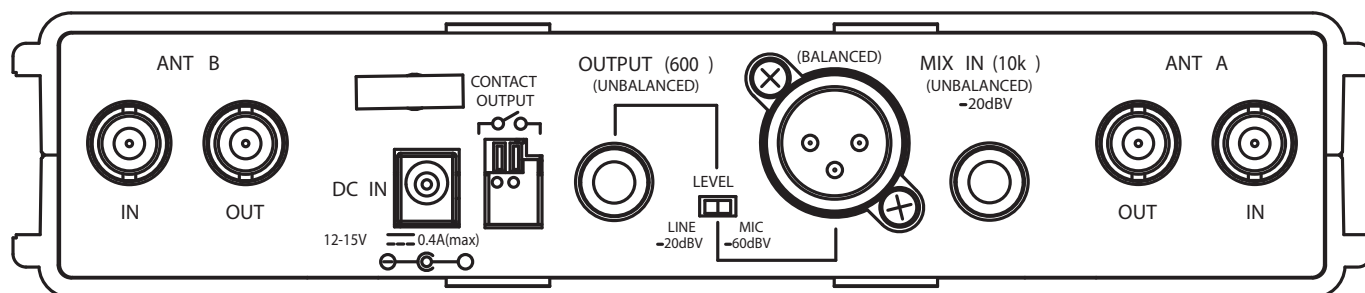

## Rear View