

P 3108

WEATHERPROOF TWO-WAY SPEAKER

DESCRIPTION

The P 3108 is a weatherproof full range, two-way speaker, suitable for a variety of professional indoor or outdoor applications. The speaker can be installed individually or coupled in array configurations. The high-frequency section includes two constant directivity CMD horns, each loaded with a 1" RCF Precision neodymium compression driver, and a 1.5" diaphragm assembly. The low-frequency section combines two 8" woofers with a 2.5" voice coil. The symmetrical arrangement of the transducers delivers a controlled horizontal dispersion. Internal circuitry provides LICC crossover and Active Mosfet Compression Driver Protection (AMCDP). The single-piece roto-molded cabinet is fully UV protected and meets IP 55 standard requirements, equipped with M8 (4x) brass inserts and one corrosion-resistant 316P stainless steel U-bracket. Connections to the amplifier are made through a watertight multi-pole connector. The front aluminum grille cover is powder coated with a water-repellent backing material, with a rotatable logo plate.



FEATURES

- 125 dB Max SPL, 300W RMS
- Weatherproof IP55 cabinet with UV protection
- Rotomoulded single piece cabinet
- 90° x 60° constant directivity horn
- 1 x 8" woofer with 2.5" voice coil
- 1 x 1.5" voice coil RCF Precision compression driver
- Built-in LICC crossover with AMCDP protection
- Amphenol IP67 4 pole input connector

TECHNICAL SPECIFICATIONS





Acoustical specifications	Frequency Response (-10dB):	80 Hz ÷ 20000 Hz
	Max SPL @ 1m:	125 dB
	Horizontal coverage angle:	90°
	Vertical coverage angle:	60°
	Directivity index Q:	11
	System Sensitivity:	94 dB
Power section	Nominal Impedance:	8 ohm
	Power Handling:	300 W RMS
	Peak Power Handling:	1200 W PEAK
	Recommended Amplifier:	600 W
	Protections:	Dynamic active mosfet
	Crossover Frequencies:	1800 Hz
Transducers	Compression Driver:	1 x 1.0", 1.5" v.c
	Nominal Impedance:	8 ohm
	Input Power Rating:	25 W AES, 50 W PROGRAM POWER
	Sensitivity:	109 dB, 1W @ 1m
	Woofer:	8", 2.5" v.c
	Nominal Impedance:	8 ohm
	Input Power Rating:	300 W AES, 600 W PROGRAM POWER
	Sensitivity:	95 dB, 1W @ 1m
Input/Output section	Input connectors:	Amphenol eco/mat IP 67
Standard compliance	IP protection grade:	IP 55
	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	PE Low Density
	Hardware:	4 x M8 + U-bracket and pair of spacers
	Grille:	Aluminum with waterproof clothing
	Color:	Grey
Size	Height:	266 mm / 10.47 inches
	Width:	493 mm / 19.41 inches
	Depth:	250 mm / 9.84 inches
	Weight:	10.6 kg / 23.37 lbs
Shipping informations	Package Height:	415 mm / 16.34 inches
	Package Width:	660 mm / 25.98 inches
	Package Depth:	415 mm / 16.34 inches
	Package Weight:	11.5 kg / 25.35 lbs


PART NUMBER

- **13000198**


P 3108

EAN 8024530008666

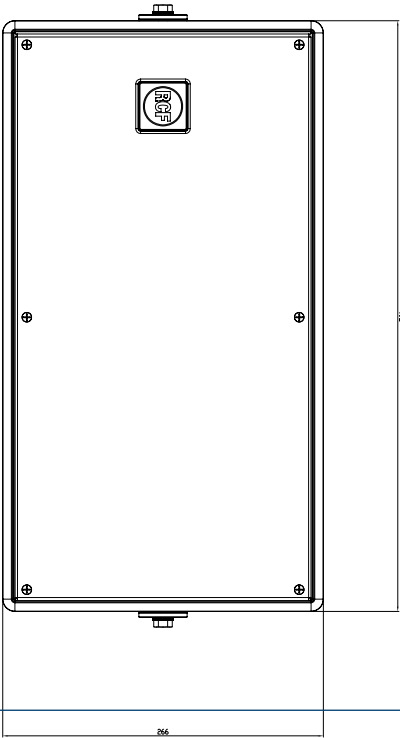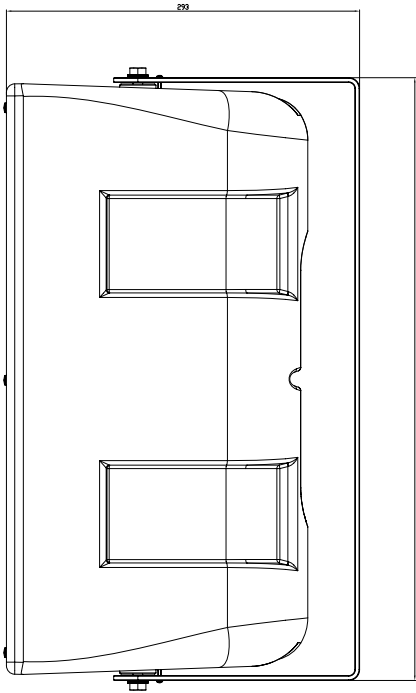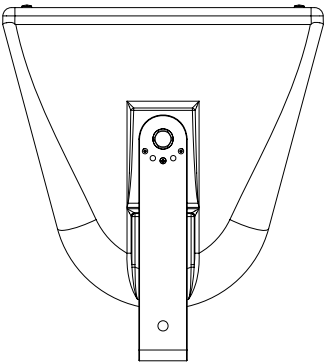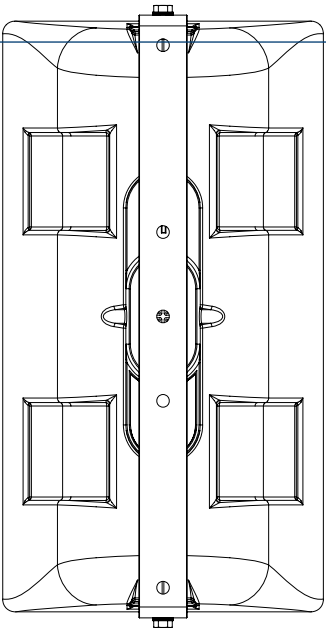


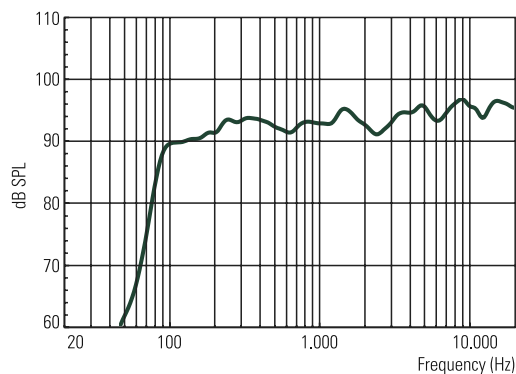


RESPONSE 1W/1m

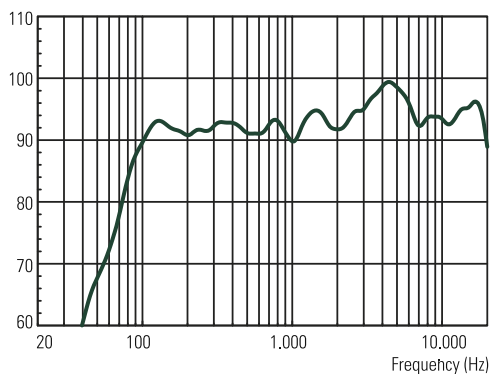


RESPONSE 1W/1m

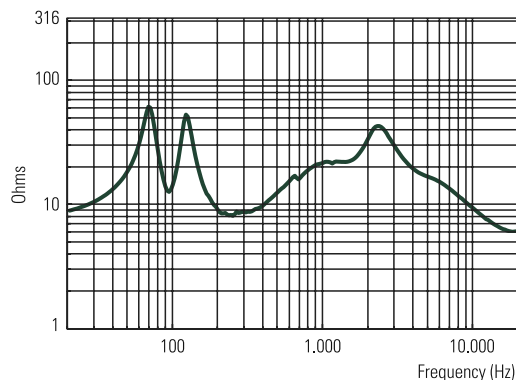


IMPEDANCE

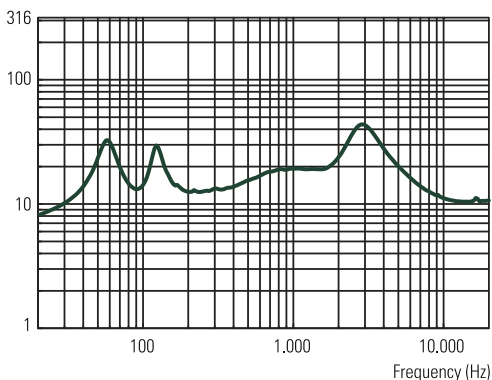


IMPEDANCE

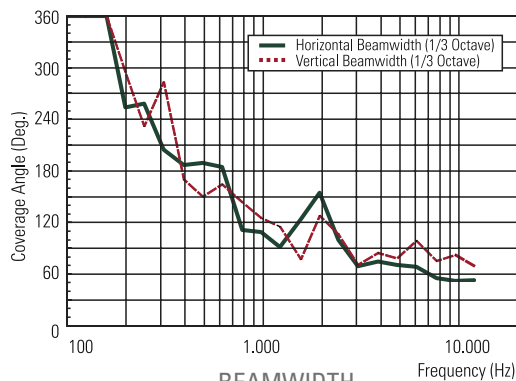


BEAMWIDTH
vs. FREQUENCY

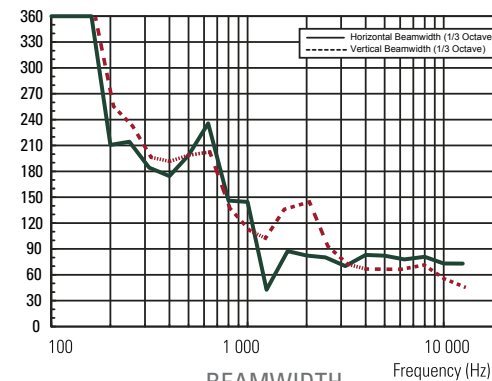

BEAMWIDTH
vs. FREQUENCY

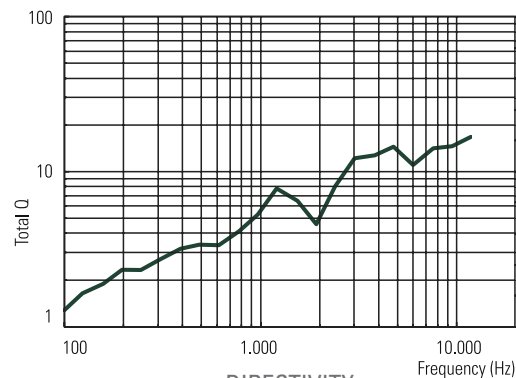

DIRECTIVITY
INDEX AND Q

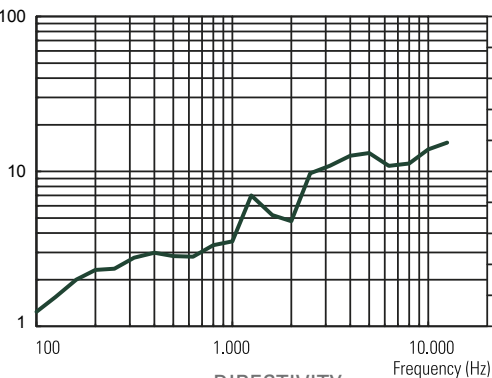

DIRECTIVITY
INDEX AND Q



ACCESSORIES