


F-1000WTWP EB-Q

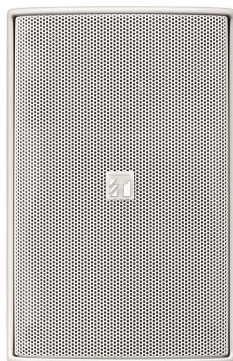

Order no: F-1000WTWPEB-Q
Alternative products: VX-3004F, VX-3008F,
VX-3016F, SX-2000AO, SX-2100AO

Specifications

Frequency response	85 Hz - 20 kHz
Connection	Push-in terminals
Sensitivity (1#V, 1#m) (combined)	87 dB
Speaker component	Woofer: 10 cm cone-typeTweeter: balanced dome-type
Directivity angle horizontal	90 °
Directivity angle vertical	90 °
Rated input	15 W
Tappings	15 / 5 / 3 / 1 W (100 V), 15 / 7.5 / 2.5 / 1.5 / 0.5 W (70 V)
Rated impedance	70 V, 100 V
Crossover frequency	5000 Hz
Dimensions (W x H x D)	130 x 202 x 131 mm
Dimensions (ø x D)	x 131 mm
Finish	HIPS resin, Steel plate, white
Operating temperature	-10°C to + 50°C

F-1000WTWP EB-Q

Appearance

