

F-1300WTWP EB-Q

SPEAKER



Order no: F-1300WTWP EB-Q
Alternative products: VX-3004F, VX-3008F,
VX-3016F, SX-2000AO, SX-2100AO


Specifications

Frequency response	80 Hz - 20 kHz
Connection	Screw terminals
Sensitivity (1#V, 1#m) (combined)	90 dB
Speaker component	Woofer: 13 cm (5") cone-type Tweeter: 25 mm (1") dome tweeter
Directivity angle horizontal	110 °
Directivity angle vertical	100 °
Rated input	30 W
Tappings	100 V (30 / 10 / 3 / 1 W), 70 V (30 / 15 / 5 / 1.5 / 0.5 W)
Rated impedance	100 V, 70 V
Crossover frequency	2000 Hz
Dimensions (W x H x D)	162 x 250 x 161 mm
Dimensions (ø x D)	x 161 mm
Finish	HIPS resin, Steel plate, white
Operating temperature	-10°C to + 50°C

F-1300WTWP EB-Q

SPEAKER

Appearance

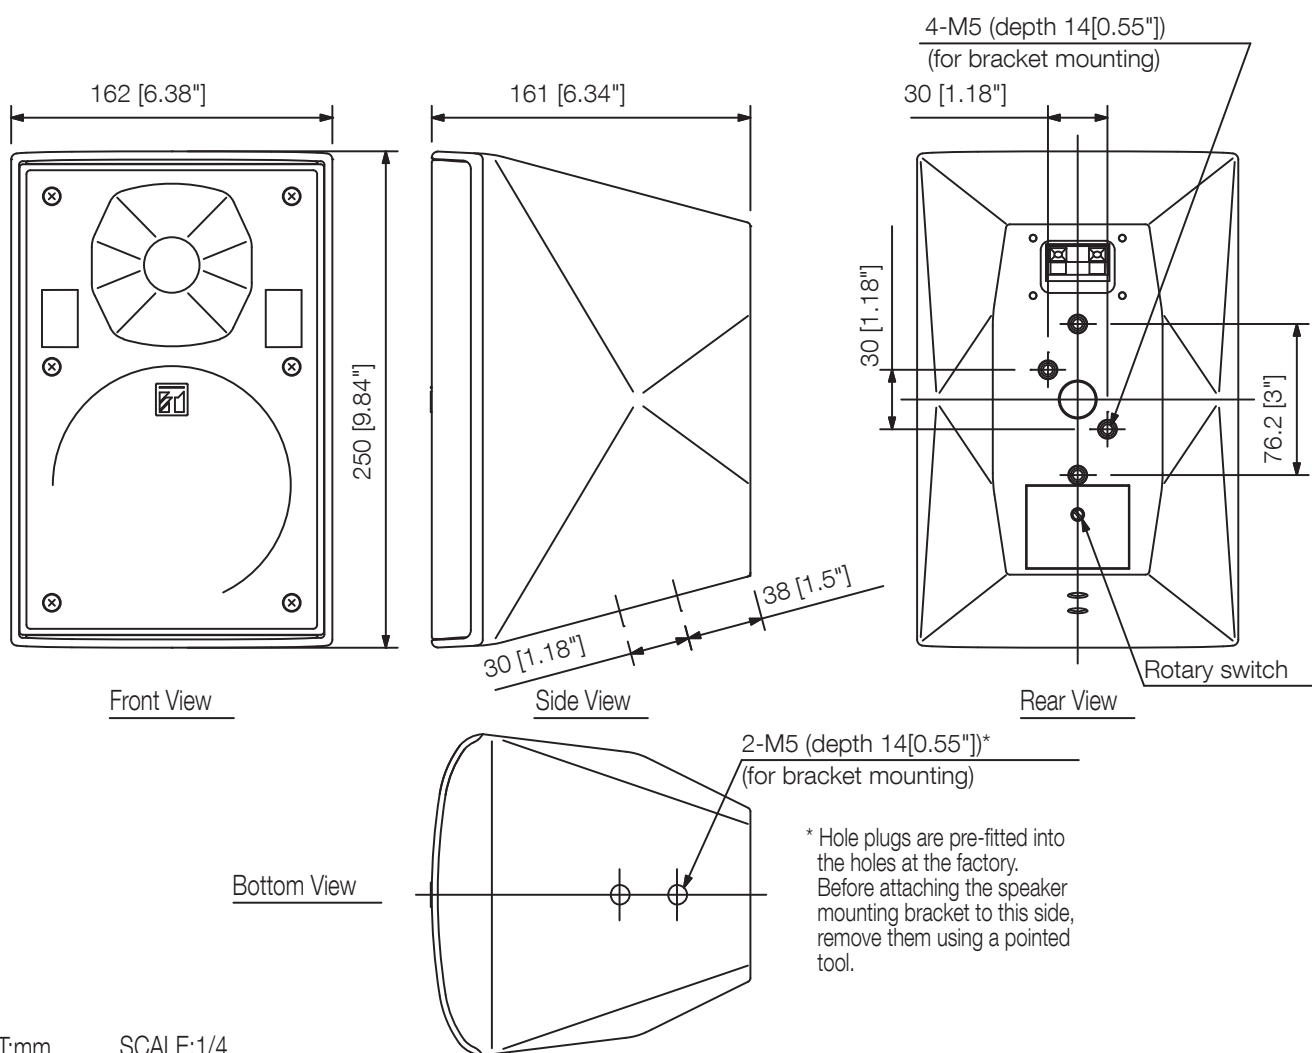

UNIT:mm

SCALE:1/4