

P 4228

WEATHERPROOF TWO-WAY SPEAKER

DESCRIPTION

The P 4228 is a weatherproof full range, two-way speaker, suitable for a variety of professional indoor or outdoor applications. The speaker can be installed individually or coupled in array configurations. The high-frequency section includes two constant directivity CMD horns, each loaded with a 1.4" RCF Precision neodymium compression driver with a 2.5" diaphragm assembly for smooth, highly controlled coverage. The low-frequency section combines two 8" woofers with a 2.5" voice coil. The symmetrical arrangement of the transducers delivers a controlled horizontal dispersion. Internal circuitry provides LICC crossover and Active Mosfet Compression Driver Protection (AMCDP). The single-piece roto-molded cabinet is fully UV protected and meets IP 55 standard requirements, equipped with M8 brass inserts (4x) and one corrosion-resistant 316P stainless steel U-bracket. Connections to the amplifier are made through a watertight multi-pole connector. The aluminum grille cover is powder coated with water-repellent backing material and has a rotatable logo plate.



FEATURES

- 129 dB Max SPL, 400W RMS
- Weatherproof cabinet IP55 with UV protection
- Rotomoulded cabinet available in white or black
- 110° x 60° constant directivity horn
- Built-in passive LICC crossover with AMCDP protection
- 2 x 8" woofer with 2.5" voice coil
- 1 x 2.5" voice coil RCF Precision neodymium compression driver
- Amphenol IP67 4 pole input connector

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB):	80 Hz ÷ 20000 Hz
	Max SPL @ 1m:	129 dB
	Horizontal coverage angle:	110°
	Vertical coverage angle:	60°
	Directivity index Q:	9
	System Sensitivity:	97 dB
Power section	Nominal Impedance:	8 ohm
	Power Handling:	400 W RMS
	Peak Power Handling:	1600 W PEAK
	Recommended Amplifier:	800 W
	Protections:	Dynamic active mosfet
	Crossover Frequencies:	1100 Hz
Transducers	Compression Driver:	1 x 1.4" neo, 2.5" v.c
	Nominal Impedance:	8 ohm
	Input Power Rating:	90 W AES, 180 W PROGRAM POWER
	Sensitivity:	110 dB, 1W @ 1m
	Woofer:	2 x 8", 2.5" v.c
	Nominal Impedance:	16 ohm
	Input Power Rating:	300 W AES, 600 W PROGRAM POWER
	Sensitivity:	95 dB, 1W @ 1m
Input/Output section	Input connectors:	Amphenol eco/mat IP 67
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	PE Low Density
	Hardware:	4 x M8 + U-bracket and pair of spacers
	Grille:	Aluminum with waterproof clothing
	Color:	Grey, White - RAL 9003
Size	Height:	268 mm / 10.55 inches
	Width:	566 mm / 22.28 inches
	Depth:	250 mm / 9.84 inches
	Weight:	14 kg / 30.86 lbs
Shipping informations	Package Height:	684 mm / 26.93 inches
	Package Width:	429 mm / 16.89 inches
	Package Depth:	394 mm / 15.51 inches
	Package Weight:	15.6 kg / 34.39 lbs



PART NUMBER

- **13100081**

P 4228 W

White - RAL 9003




EAN 8024530017507


- **13000199**

P 4228


Grey

EAN 8024530008673

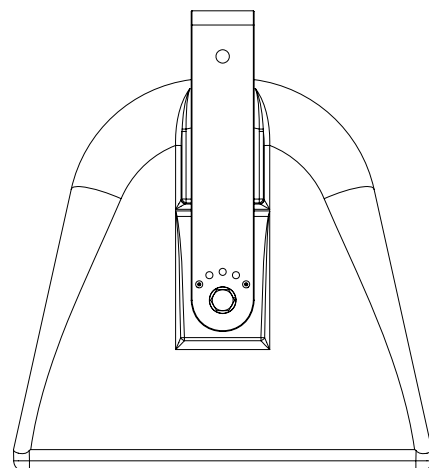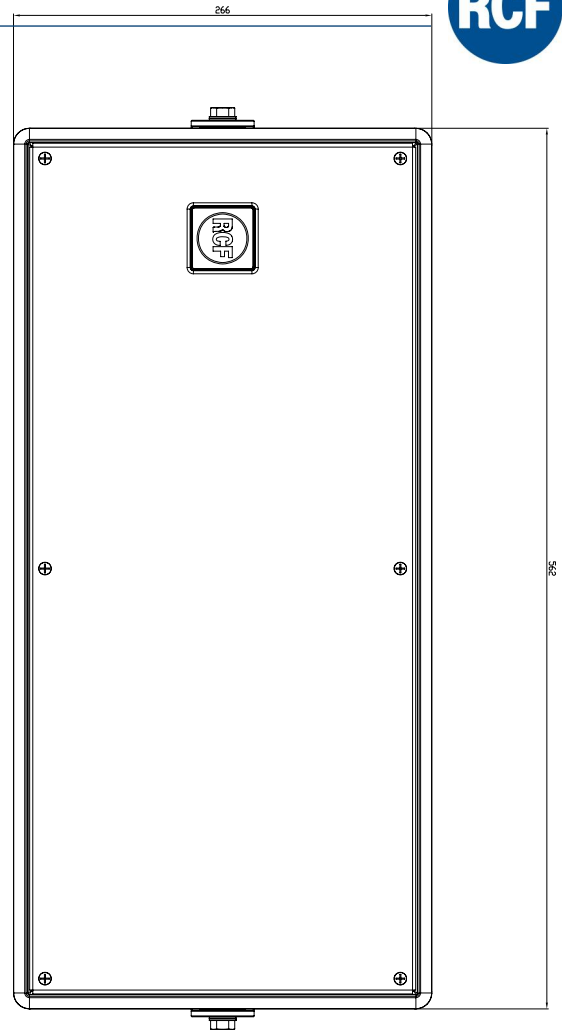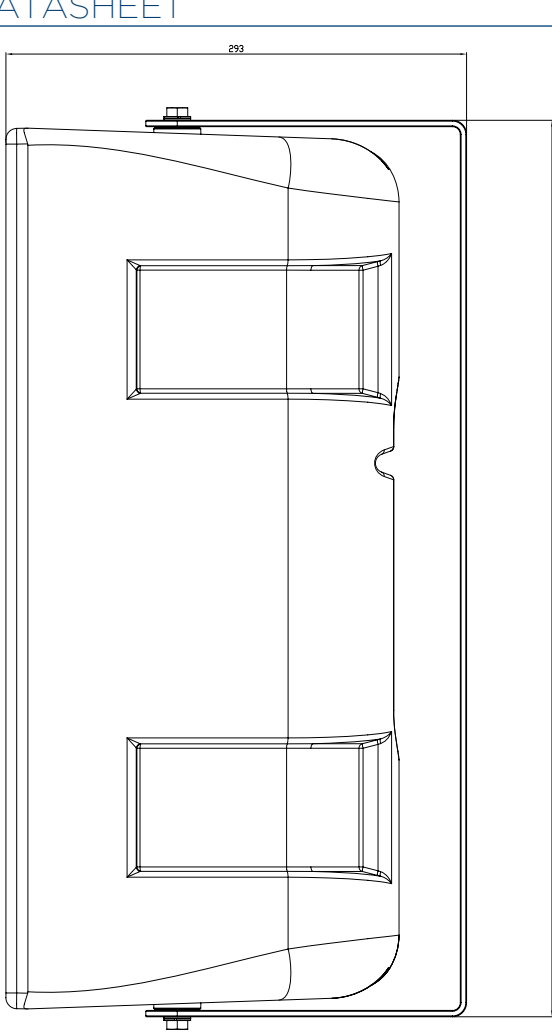


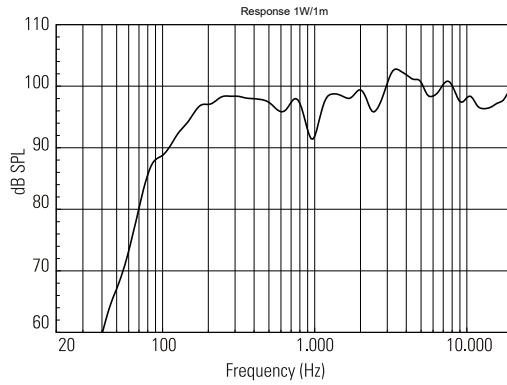


RESPONSE 1W/1m

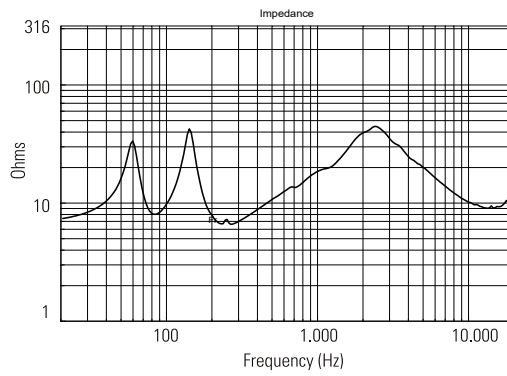

IMPEDANCE

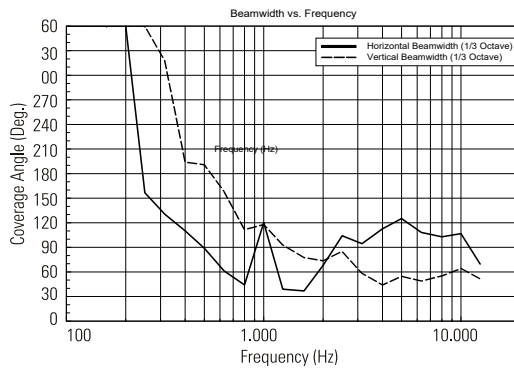

BEAMWIDTH vs. FREQUENCY

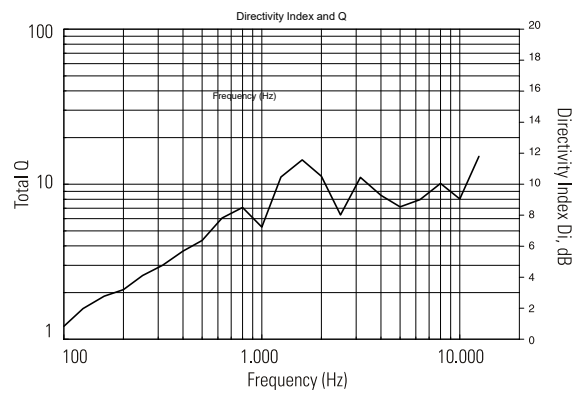

DIRECTIVITY INDEX AND Q

ACCESSORIES



CLUSTER BRACKETS FOR P4228/P5228

PART NUMBER

13360119

EAN:
